

LINE

CLASSIC MODELS

Features



- For exhaust ventilation of residential premises
- Wall surface or ceiling mounting
- Low noise impeller
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor



Air flow:
up to 292 m³/h
81 l/s



Power:
from 14 W



SFP:
from 0.3 W/l/s



Noise level:
from 34 dBA




Options




Model	Line 100/125/150					
Option	S	T	TR	ST	H	SH
Pull cord switch	•			•		•
Turn-on delay timer			•	•	•	•
Turn-off delay timer		•	•	•	•	•
Humidity sensor					•	•

- Turn-on delay timer**
 - Delay time 45 seconds.
- Turn-off delay timer**
 - Adjustable delay from 2 to 30 minutes.
- Humidity sensor**
 - Humidity sensor activation threshold is adjustable from 60 % to 90 %.

Overall dimensions and mounting

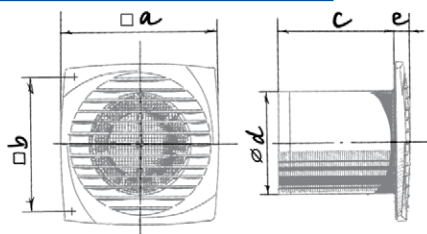


Dimensions [mm]	a	b	c	Ø d	e
Line 100	150	120	109	100	12.5
Line 120	176	140	109	117	12.5
Line 125	176	140	114	125	12.5
Line 150	205	165	132	150	13

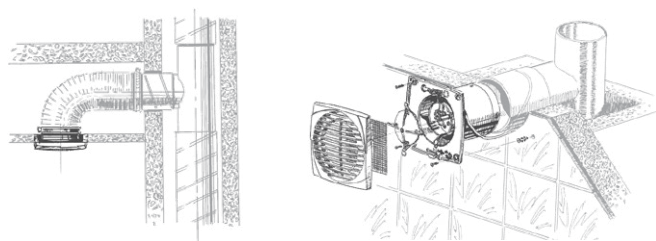

Technical data

Model	Line 100	Line 120	Line 125	Line 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50	220-240/50
Power [W]	14	17	16	24
Current [A]	0.085	0.1	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400	2400
Air flow [m ³ /h (l/s)]	95 (26)	174 (48)	180 (50)	292 (81)
SFP [W/l/s]	0.53	0.35	0.32	0.3
Sound pressure level [dBA]*	34	36	35	38

* Sound pressure level measured in free space at a distance of 3 meters from the fan.



Designation key

Line	100	S
Model	Spigot diameter	Option

Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
				
BlauPlast	BlauFlex	Decor, GM	CDT E1.8 MCD 60/0.3	K, KZ